



SMD Power Inductors - SESI 18WR High Reliability Applications

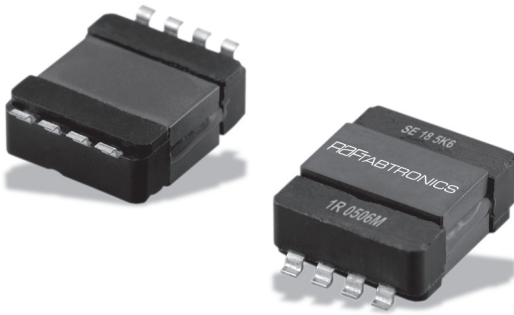

- Energy storage, smoothing, filtering
- Applied standards: MIL-PRF-27 Class V Grade 5 capable ECSS-Q-70-02, DO-160
- **eesa** ESCC 3201/009 versions upon request
- Materials meet UL94-V0 rating
- Suited for IR and vapor reflow soldering
- Frequency range up to 1 MHz
- Operating ambient temperature range: -55 °C to +125 °C
- Weight: 10 grams typical
- Shielded version upon request

Notes


1. Inductance at 0.25 V, 100 kHz
2. I rated (permanent DC) without heatsink ; mounted via heatsink I = I rated x 1.4
3. Typical inductance value at recommended rated current
4. I peak max = maximum peak value of current at +125 °C; L value not guaranteed
5. 40 % admissible I ripple over I rated at f = 200 kHz
6. Isolation voltage 500 Vdc
1 min electrification 100 GΩ minimum between winding and magnetic core

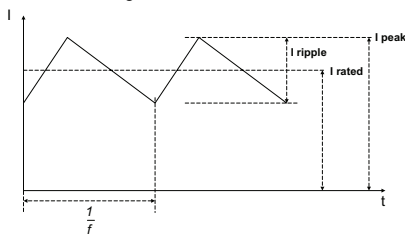


Connections




Marking



Dimensions (mm, top view)




PCB Layout (suggested)



Packaging (mm, top view)

Tape and Reel:
300 pieces per reel of diameter 330 mm

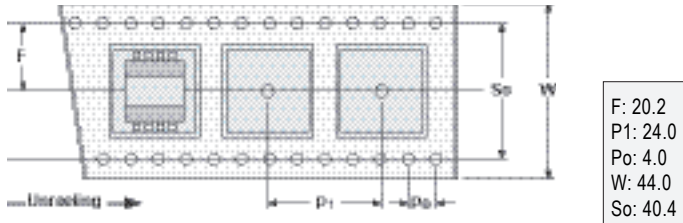

Electrical Data (25°C)

ID Code	L ¹ no load μH	I ² rated A	L ³ at rated I μH	I ⁴ peak max A	Rdc at 25°C mΩ Max	L Tol. ± %
SESI 18 6K8 1WR	6.8	9.8	4.2	13.6	7.5	20
SESI 18 8K2 1WR	8.2	8.3	5.7	11.5	9.0	
SESI 18 11K 1WR	11	7.2	7.7	10	12	
SESI 18 15K 1WR	15	6.35	10.5	8.9	15	
SESI 18 18K 1WR	18	5.7	12.6	7.9	17	
SESI 18 22K 1WR	22	5.1	15.4	7.2	20	
SESI 18 22K 2WR	22.2	5.6	15.4	7.3	33	
SESI 18 27K 1WR	27	4.7	18.9	6.5	25	
SESI 18 37K 1WR	37	4.0	25.9	5.6	29	
SESI 18 49K 1WR	49	3.5	34.3	4.8	45	
SESI 18 56K 1WR	56	3.3	39	4.6	48	
SESI 18 70K 1WR	70	2.9	49	4.1	65	
SESI 18 86K 1WR	86	2.6	60	3.7	72	
SESI 18 M10 1WR	100	2.4	70	3.3	75	
SESI 18 M12 1WR	120	2.2	84	3.1	115	
SESI 18 M15 1WR	150	1.95	105	2.7	125	
SESI 18 M18 1WR	180	1.8	126	2.6	175	
SESI 18 M22 1WR	220	1.6	154	2.3	210	
SESI 18 M33 1WR	330	1.34	231	1.9	250	

To Order

SESI	18	###	#	W	R
SMD Energy Storage Inductor	Size	Value code 4K9 = 4,9 μH M10 = 100 μH 1M0 = 1000 μH	Version	GW Terminals	High reliability



Tel: 1-888-876-6424
Fax: 1-585-243-3831
sesi@raftabtronics.com
www.raftabtronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright 2010. RAF Tabtronics LLC. All rights reserved.